


Multi-Seeder 2100

The floating twin spike rollers of the Multi-Seeder follow the contours, saturating the surface with small holes. The seed is then accurately distributed onto the surface before an adjustable brush sweeps the seeds into the holes. The rear roller then passes over to cover the seed for germination.

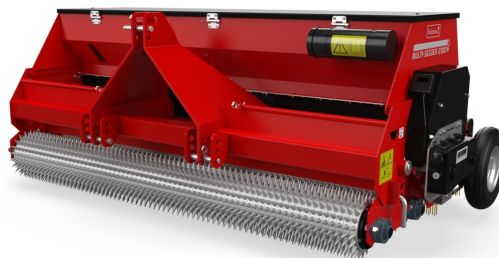

Specifications

SKU	124.210.004
Operation	Tractor pulled
Working width (m)	2.1
Working width (inch)	82.7
Max. Working depth (mm)	5 - 20
Max. Working speed (km h)	12
Max. Working speed (mph)	7.5
Weight (kg)	922
Weight (lbs)	2033
Hopper capacity (L)	270
Hopper capacity (cu.ft.)	9.5
Min. Tractor HP required	45
Min. Lifting capacity 610 mm behind the lifting eyes (kg)	1650
Min. Lifting capacity 24 inch behind the lifting eyes (lbs)	3638
Min. Pressure (bar)	1 - 2
Min. Pressure (psi)	14.5 - 29
Three-point hitch	CAT 1 - 2
Lubricant	EP 2
Dimensions (width mm)	2436
Dimensions (height mm)	935
Dimensions (length mm)	1323
Dimensions (width inch)	95.9
Dimensions (height inch)	36.8
Dimensions (length inch)	52.1

Distributed by:



www.centaur-asiapacific.com
info@centaur-asiapacific.com

*Hong Kong, Macau, Malaysia (Johor).