




HORSEPOWER	10	15	20	25
HT x DIA ft UPPER	17 x 3	18 x 3	21 x 4	25 x 4
HT x DIA ft MIDDLE	14 x 3	15 x 3	16 x 4	20 x 4
HT x DIA ft LOWER	9 x 3	10 x 3	12 x 4	15 x 4
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 60			
	3 220-240 36	3 220-240 46	3 220-240 58	3 220-240 72
	3 440-480 18	3 440-480 23	3 440-480 29	3 440-480 36
Consult Factory				

2H09
50H

NOTE:
THE OLYMPIAN PATTERN IS NOT INTERCHANGEABLE

CELESTIAL FOUNTAIN® DESIGN TYPES


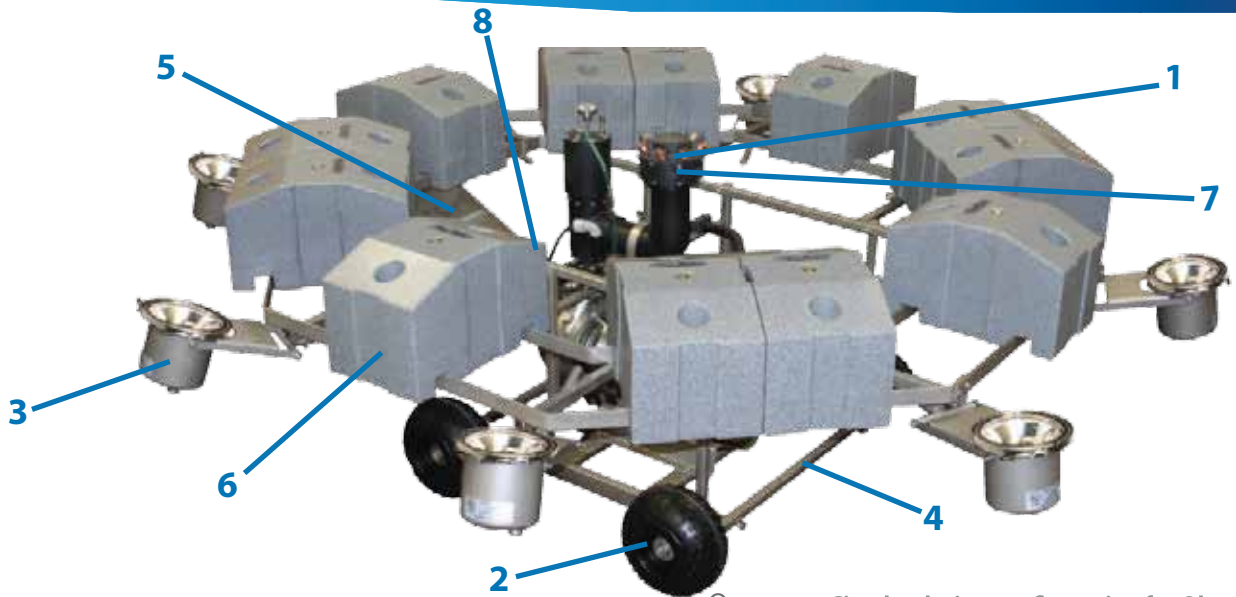


Celestial Fountains®
(Min. Operating Depth - 4ft.)

Circular design configuration for Olympian model.

- 1 - Nozzle for 10 to 25 HP
- 2 - Oversized floatation for ease of launching
- 3 - Adjustable Night Glow LED or RGBW Lighting
- 4 - Heavy-duty tubular welded stainless steel frame design adds strength and longevity
- 5 - Removable (without tools) large capacity, rigid 16 gauge stainless steel intake screen
- 6 - Individual high density polyethylene floats are in-water adjustable
- 7 - Discharge Assembly
- 8 - Rugged, heavy-duty stainless steel centrifugal pump system for highest efficiency and durability

INSTALLATION

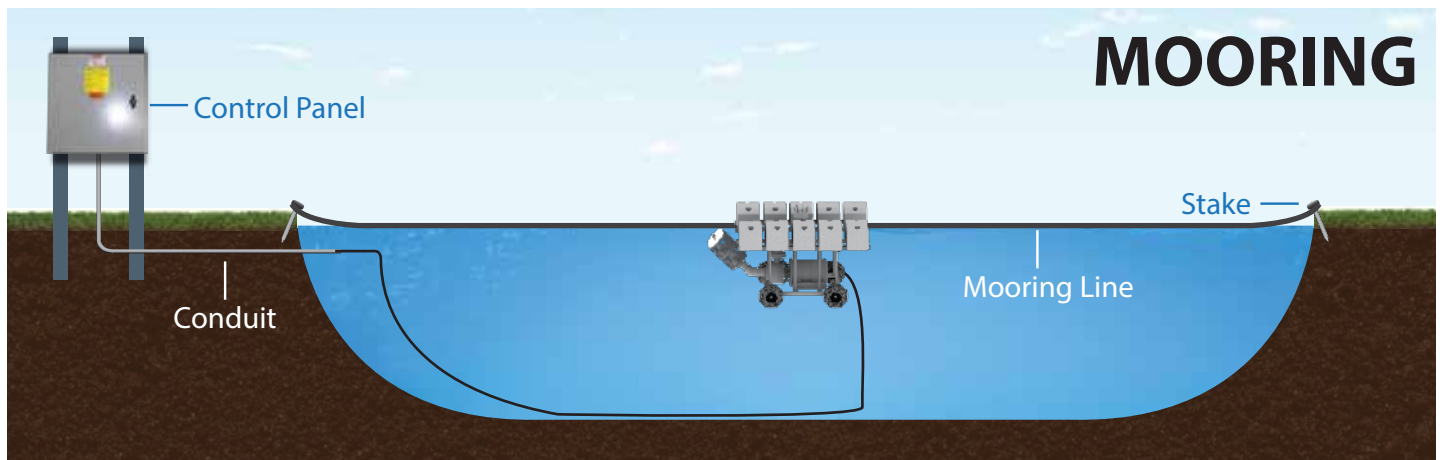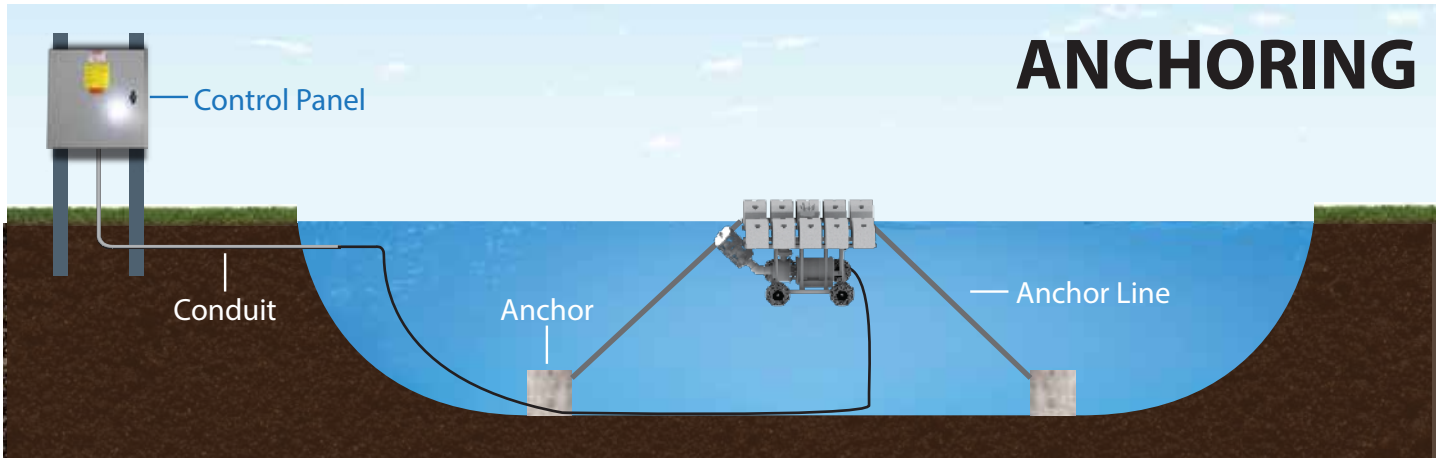

CONTROL PANEL



CONTROL PANEL COMPONENTS

- Outdoor rated, lockable enclosure constructed of galvanized steel powder coated gray
- Standard enclosure size 24" x 20" x 6" (10HP 1PH)
30" x 24" x 8" (10-25HP 3PH)
- Digital timers with battery backup
- LED lighting circuit included in all control panels
- Custom Control Panels for multiple units and options available
- Overcurrent protection
- Ground fault protection
- Motor contactor and overload-10HP 1PH
- Capacitors (single phase only)
- Soft Starter and Manual Motor Protector (10-25HP 3 PH)

